



This side port connection HRV for budget conscious house projects, the PHRV150 unit brings a continuous supply of fresh air into a home while exhausting an equal amount of contaminated air. During winter, fresh incoming air is tempered by the heat that is transferred from the outgoing air so you save on energy costs, while during summer, the incoming air is pre-cooled if the house is equipped with an air cooling system. The PHRV150 is equipped with automatic defrost mechanisms so you can use your HRV all year long.

## FEATURES

- Airflow up to 159 CFM (75 L/s) @ 0,4"Ps (100 Pa)
- 6" (152mm) duct connections
- Compact design
- Fans with backward curved RadiCAL blade
- Electrostatic filters (washable)
- Aluminum heat recovery core
- Removable screw terminal for easy connection
- Easy Core Guide Channels For Removing Core
- Only weighs 46 lbs (20Kg)

## CONTROL INCLUDED

- Dehumidistat1 – Dehumidistat

## OPTIONAL CONTROLS

- DIR-TS – Programmable Touch Screen Wall Control
- DIR-DG – Electronic multi-function dehumidistat
- RTS5 – 20/40/60 minute Timer
- RTS20 – 20 minute Timer

# PHRV150

## Heat Recovery Ventilator

Product#: 99193

## SPECIFICATIONS

**Fans** Two (2) factory-balanced fans with backward curved blades. Motors come with permanently lubricated, sealed ball-bearings to guarantee long life and maintenance-free operation.

**Heat Recovery Core** Aluminum heat recovery core covered by a limited lifetime warranty. Core dimensions are 9" x 9" (229 x 229 mm) with a 15" (380 mm) depth. Our heat exchangers are designed and manufactured to withstand extreme temperature variations.

**Defrost** A preset defrost sequence is activated at an outdoor air temperature of 23°F (-5°C) and lower. During the defrost sequence, the supply blower shuts down & the exhaust blower switches into high speed to maximize the effectiveness of the defrost strategy. The unit then returns to normal operation, and continues cycle..

**Serviceability** Core, filters, fans, drain pan and electrical panel can be accessed easily from the access panel. Core conveniently slides out with only 17" (432 mm) clearance.

**Case** 24 gauge galvanized steel. Baked powder coated paint.

**Insulation** Cabinet is fully insulated with 1" (25 mm) foil-face high density expanded polystyrene.


**Filters** Two (2) washable electrostatic panel type air filters 8.5" (216mm) x 15" (380 mm) x 0.125" (3mm).

**Controls** External three (3) position (Low/Stand By/Medium) rocker switch that will offer continuous ventilation. (see controls)



**Installation** Unit is typically hung by using installation kit supplied with unit. Mounting bolts provided on top four (4) corners of unit.

**Warranty** Limited lifetime on aluminum core, 7 year on motors, and 5 year on parts.

DISTRIBUTED BY:

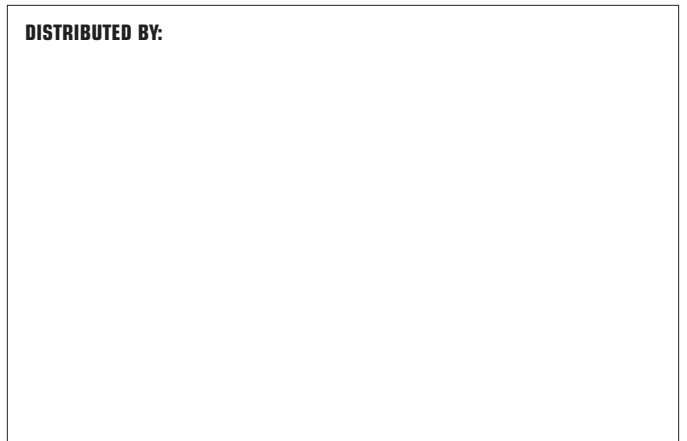


## Dimensions & AIRFLOW - All units feature three foot plug-in power cord with 3-prong plug.

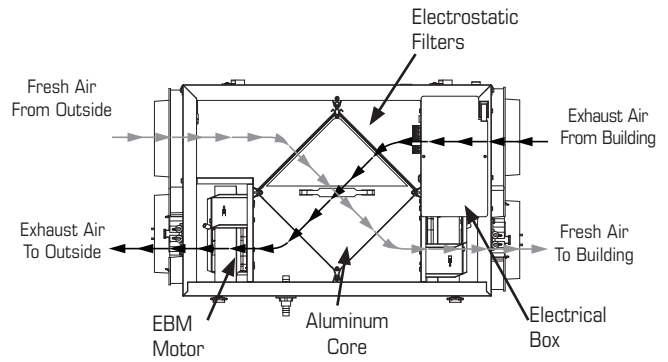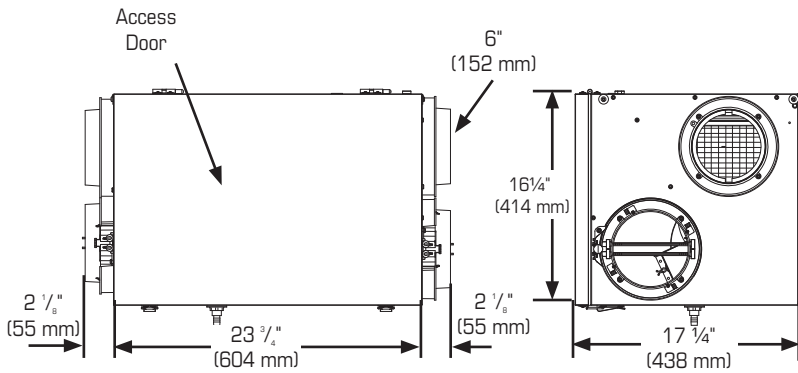

## Ventilation Performance

EXT. STATIC PRESSURE		NET SUPPLY AIR FLOW		GROSS AIR FLOW SUPPLY		GROSS AIR FLOW EXHAUST	
Pa	in wg	L/s	cfm	L/s	cfm	L/s	cfm
25	0.1	89	188	90	191	93	197
50	0.2	86	182	88	186	88	187
75	0.3	81	173	83	176	83	176
100	0.4	75	159	77	162	78	165
125	0.5	68	144	69	147	75	159
150	0.6	60	128	62	130	66	140
175	0.7	53	113	54	115	60	128
200	0.8	48	101	48	103	54	114
225	0.9	43	92	44	94	47	100

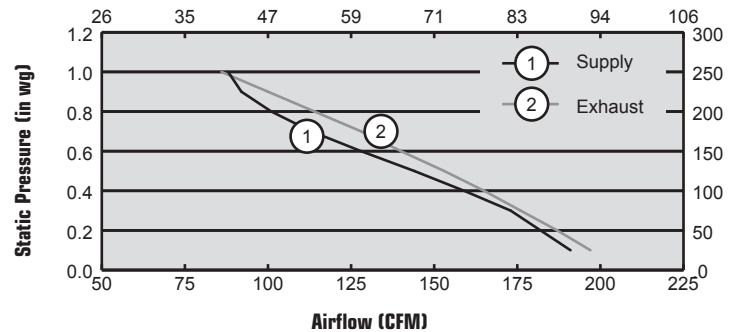

## Energy Performance

	SUPPLY TEMPERATURE		NET AIRFLOW		POWER CONSUMED WATTS	SENSIBLE RECOVERY EFFICIENCY	APPARENT SENSIBLE EFFECTIVENESS	LATENT RECOVERY/MOISTURE TRANSFER
	°C	°F	L/s	CFM				
Heating	0	32	75	159	140	60	66	-0.01
	0	32	48	101	94	63	70	-0.02
	0	32	40	85	70	61	66	-0.02
	-25	-13	40	85	71	58	60	-0.01

## Specifications and Ratings

- Model: PHRV150
- Total assembled weight: 46 lbs (20Kg)
- Cabinet: 24 ga, steel with powder coat finish
- Motors: ebm motor with backward curved blades
- Filters: 2 washable electrostatic filters 8.5" (216mm) x 15" (380mm) x 0.125" (3mm)
- Insulated with 1" (25mm) high density polystyrene foam to prevent condensation
- Core: Aluminum 9" (229mm) x 9" (229mm) x 15" (380mm)
- Supply & exhaust ducts: 6" (150 mm)
- Mounting: Suspended by chains & hooks
- Electrical requirements:
 

Volts	Frequency	Amps	Watts
120V	60Hz	1.4A	156W

## Contacts

Submitted by:	Date:
Qty:	Model #:
Comments:	
Project #:	
Location:	
Architect:	
Engineer:	
Contractor:	

- |  |   |  |
|--|---|--|
| <p><b>Toronto</b><br/>111 Staffern Drive<br/>Concord, ON, L4K 2R2<br/>(T) 905.660.0033<br/>(F) 905.660.8881<br/>toronto@powrmatic.ca</p> | <p><b>London</b><br/>1064 Hargrieve Road<br/>London, ON N6E 1P5<br/>(T) 519.675.1491<br/>(F) 519.675.4725<br/>london@powrmatic.ca</p> | <p><b>Halifax</b><br/>100, Wright Ave<br/>Dartmouth, NS, B3B 1L2<br/>(T) 902.454.8684<br/>(F) 902.453.5875<br/>halifax@powrmatic.ca</p>    |
| <p><b>Ottawa</b><br/>1412 Star Top Rd<br/>Goucester, ON K1B 4V7<br/>(T) 613.230.7160<br/>(F) 613.230.0685<br/>ottawa@powrmatic.ca</p>    | <p><b>Québec</b><br/>365, Fortin<br/>Vill-Vanier, QC G1M 1B2<br/>(T) 418.683.2708<br/>(F) 418.683.8860<br/>quebec@powrmatic.ca</p>    | <p><b>Montréal</b><br/>9500 BLVD. Ray-Lawson<br/>Anjou, QC H1J 1L1<br/>(T) 514.493.6400<br/>(F) 514.493.8722<br/>montreal@powrmatic.ca</p> |

