




SINGLE ZONE SYSTEM  
**EXTREME**  
*Ultra Heat*  
SÉRIE

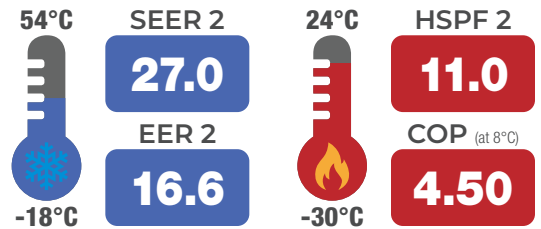

**THE ALL-NEW EXTREME, SIMPLY THE BEST**

The **Extreme** Series offers advanced performance with an industry-leading efficiency rating of 27.0 SEER 2 in cooling operation and 11.0 HSPF 2 in heating operation. Its quiet design combined with its unmatched energy efficiency makes the **Extreme** the ideal choice for any home or office.

**SMART WI-FI CONTROL**

Featuring built-in smart Wi-Fi, the **Extreme** allows you to operate your equipment via your cell phone or tablet from anywhere you have Wi-Fi access using the GREE+ app.



**FEATURES AND BENEFITS:**

I FEEL FUNCTION	TURBO MODE	INTELLIGENT DEFROSTING	AUTO RESTART	CONTROL LOCK	TIMER	SLEEP MODE	INTELLIGENT PREHEATING	AUTOMATIC OPERATION	LED DISPLAY	ENERGY SAVER		
DEHUMIDIFYING	CLOCK	SELF-CLEANING	SELF-DIAGNOSIS	3D AIRFLOW	WI-FI CONTROL	WIRED CONTROLLER	<table border="1"> <tr> <td> INCLUDED FUNCTION</td> <td> OPTIONAL FUNCTION</td> </tr> </table>				INCLUDED FUNCTION	OPTIONAL FUNCTION
INCLUDED FUNCTION	OPTIONAL FUNCTION											



Extreme  
Condensing Unit



Remote Control  
YAG1FBF



**IN OPTION**  
Wired Controller  
XE-71



Extreme  
Wall-Mounted Unit



GREE+ app

- Ultra Heat technology
- G10 Inverter technology
- Energy Star® certified
- Wi-Fi control by mobile device (GREE+ app)
- Precise airflow control
- Low voltage start-up
- Vertical and horizontal swing louver control
- Fins with anti-corrosion coating
- Multiple fan speed
- Adjustable LED display
- Washable dust filters
- Heavy gauge steel cabinet
- Two-stage variable speed compressor
- Eco-friendly R410A refrigerant

			EXTREME	9000	12000	18000	24000	
Indoor Unit:				GWH09AAD-D3DNA2B/I	GWH12AAD-D3DNA2A/I	GWH18AAE-D3DNA2A/I	GWH24AAE-D3DNA2A/I	
Outdoor Unit:				GWH09ACD-D3DNA1A/O	GWH12YD-D3DNA1A/O	GWH18YE-D3DNA1A/O	GWH24YE-D3DNA1A/O	
AHRI Code:				204325176	9944776	9114294	9123256	
Power Supply			V/Hz/Ph	208-230 / 60 / 1				
<b>SYSTEM PERFORMANCE</b>								
Capacity	Cooling	BTU/hr	9,000 (1,535 – 12,966)		12,000 (2,900 – 15,354)		18,000 (4,094 – 21,837)	
	Heating	BTU/hr	9,000 (2,388 – 13,648)		12,200 (3,071 – 18,766)		18,000 (4,094 – 24,566)	
Power Input	Cooling	W	540 (50 – 1,400)		785 (75 – 1,500)		1,330 (350 – 2,500)	
	Heating	W	610 (200 – 1,500)		940 (250 – 1,600)		1,500 (350 – 2,500)	
SEER 2		BTU/W*hr	27.0		24.0		22.0	
EER 2		BTU/W*hr	16.6		14.0		13.5	
HSPF 2		BTU/W*hr	11.0		8.5		10.0	
COP		W/W	4.47		3.80		3.52	
Energy Star®		—	YES		YES		YES	
Minimum Circuit Ampacity (MCA)		A	9		9		22	
Maximum Overcurrent Protection (MOP)		A	16		15		30	
<b>INDOOR UNIT SPECIFICATIONS</b>				GWH09AAD-D3DNA2B/I	GWH12AAD-D3DNA2A/I	GWH18AAE-D3DNA2A/I	GWH24AAE-D3DNA2A/I	
Moisture Removal Capacity		L/hr (pt/hr)	0.80 (1.69)		1.40 (2.96)		1.80 (3.80)	
Airflow Volume		m³/hr (CFM)	720/650/600/550/500/450/350 (424/383/353/324/294/265/206)		850/800/750/600/550/450/400 (500/471/441/353/324/265/235)		1250/1150/1050/950/850/780/600 (736/677/618/559/500/459/353)	
Sound Pressure Level		dB(A)	46 / 40 / 38 / 36 / 33 / 31 / 19		49 / 46 / 43 / 40 / 37 / 34 / 22		51 / 48 / 45 / 42 / 39 / 36 / 34	
Dimensions	Width	mm (in)	970 (38-3/16)		970 (38-3/16)		1080 (42-33/64)	
	Height	mm (in)	300 (11-13/16)		300 (11-13/16)		325 (12-51/64)	
	Depth	mm (in)	225 (8-55/64)		225 (8-55/64)		248 (9-49/64)	
Weight	Net	kg (lb)	13.5 (29.8)		13.5 (29.8)		16.5 (36.4)	
	Gross	kg (lb)	16.5 (36.4)		16.5 (36.4)		19.5 (43.0)	
<b>OUTDOOR UNIT SPECIFICATIONS</b>				GWH09ACD-D3DNA1A/O	GWH12YD-D3DNA1A/O	GWH18YE-D3DNA1A/O	GWH24YE-D3DNA1A/O	
Ambient Temperature	Cooling	C° (F°)	-18 to 54 (0 to 129)					
	Heating	C° (F°)	-30 to 24 (-22 to 75)					
Sound Pressure Level		dB(A)	53		53		59	
Dimensions	Width	mm (in)	899 (35-3/8)		899 (35-3/8)		1000 (39-3/8)	
	Height	mm (in)	596 (23-1/2)		596 (23-1/2)		790 (31-7/64)	
	Depth	mm (in)	378 (14-7/8)		378 (14-7/8)		427 (16-13/16)	
Weight	Net	kg (lb)	45.0 (99.2)		45.0 (99.2)		64.0 (141.1)	
	Gross	kg (lb)	48.0 (105.8)		48.0 (105.8)		72.0 (158.8)	
<b>REFRIGERATION SYSTEM</b>								
Suction Line Size		mm (in)	ø 12.70 (1/2)		ø 12.70 (1/2)		ø 15.88 (5/8)	
Liquid Line Size		mm (in)	ø 6.35 (1/4)		ø 6.35 (1/4)		ø 6.35 (1/4)	
Standard Pipe Length		m (ft)	7.5 (24.6)		7.5 (24.6)		7.5 (24.6)	
Maximum Pipe Length		m (ft)	15 (49.2)		20 (65.6)		25 (82.0)	
Maximum Pipe Elevation		m (ft)	10 (32.8)		10 (32.8)		10 (32.8)	
Refrigerant Type / Charge		kg (oz)	R410A / 1.3 (45.9)		R410A / 1.4 (49.4)		R410A / 2.1 (74.1)	



GREE Canada products are subject to continuous improvements. GREE Canada reserves the right to modify product design, specifications and information without notice and without incurring obligations.

Authorized dealer