

C SERIES

LINEAR GAS FIREPLACES



enviro.com



Ledgestone Liner – Ultra High Definition Log Set



Fluted Liner – Ultra High Definition Log Set



Painted Black Liner – Signature Birch Log Set





Ledgestone Liner – Bezel Base



Fluted Liner – Bezel Base



Black Glass Liner – Bezel Base



Ledgestone Liner – Ultra High Definition Log Set



Fluted Liner – Ultra High Definition Log Set



Painted Black Liner – Signature Traditional Log Set





Painted Black Liner – Signature Birch Log Set



Fluted Liner – Full Glass Tray



Black Glass Liner – Full Glass Tray



Ledgestone Liner – Bezel Base



Fluted Liner – Bezel Base



Black Glass Liner – Full Glass Tray





Ledgestone Liner – Ultra High Definition Log Set



Fluted Liner – Ultra High Definition Log Set



Painted Black Liner – Signature Traditional Log Set



Fluted Liner – Signature Traditional Log Set



Painted Black Liner – Signature Birch Log Set



Black Glass Liner – Ultra High Definition Log Set





Ledgestone – Ultra High Definition Log Set



Fluted Liner – Ultra High Definition Log Set



Painted Black Liner – Signature Birch Log Set




Specifications

	C34			C44			C60			C60 TALL NEW			C72		
BTU Maximum Input - NG / LP	30,000 BTU's			38,000 BTU's			51,000 BTU's			51,000 BTU's			55,000 BTU's		
BTU Minimum Output - NG / LP	15,000 BTU's			17,000 BTU's			25,500 BTU's			25,500 BTU's			36,850 BTU's		
Turn Down - IPI	33%			33%			33%			33%			33%		
FE Efficiency **	64.6%			64.3%			65.7%			71.5%			61.16%		
Valve Configuration	IPI			IPI			IPI			IPI			IPI		
Venting	5" x 8"			5" x 8"			5" x 8"			5" x 8"			5" x 8"		
Flex Venting	Up to 40'			Up to 40'			Up to 40'			Up to 40'			Up to 40'		
Weight (Average Weight including liner and media)	232 lbs			235 lbs			354 lbs			370 lbs			365 lbs		
Glass Size	HEIGHT	WIDTH		HEIGHT	WIDTH		HEIGHT	WIDTH		HEIGHT	WIDTH		HEIGHT	WIDTH	
	14"	34½"		14"	44½"		14"	60½"	20"	60½"	14"	72½"			
Visible Dimensions	16⅝"	36⅝"		16¼"	46⅝"		16⅝"	62⅝"	22⅝"	62⅝"	16⅝"	74⅝"			
Minimum Framing Dimensions †	HEIGHT	WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH
	38"	45"	20"	38"	55"	20"	38"	71"	20"	44"	71"	19½"	38"	83"	20"

**Based on the measured P.4-15 rating of the IPI model. | † Please refer to owners manual for detailed installation instructions.

Power Vent Kit


- A minimum venting run of 10 feet
- A maximum venting run of 110 feet
- Max of 6 elbows in vent configuration
- Venting can run downward 4' below the unit
- Flush mount (paintable) termination
- Run Quiet Fan System (noise reduction)

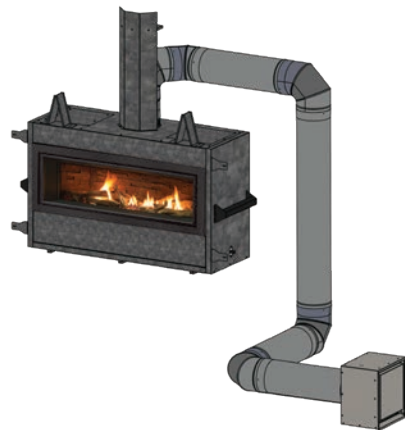

Cool Surface System HDK

In the past, wall mounted televisions or treasured decor pieces would degrade over time from the excess rising heat produced by your gas fireplace. Our new **Cool Surface System** for the C Series allows you to make use of the valuable real estate directly above your linear gas fireplace. It can channel heat inside the wall and vent it out above the fireplace.

(Included with the C60 Tall)

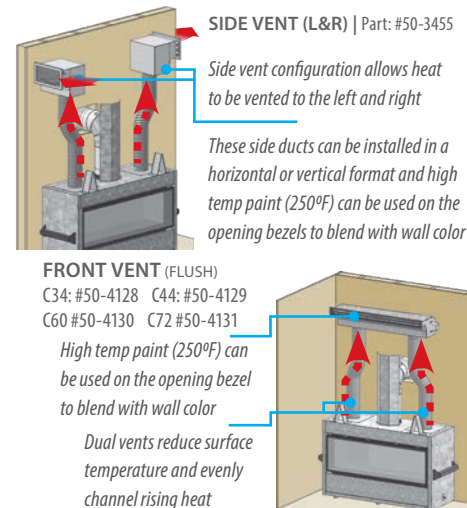

Ultra HD Log Set



Compatible with all units

River Rock Set w/Twigs



Compatible with all units

Signature Traditional Log Set



Compatible with all units

Signature Birch Log Set



Compatible with all units

Full Glass Tray



Compatible with all units

Halogen Light Kit



Compatible with the C34, C44, & C60

Media Bezel



Black Glass

Painted Black

Compatible with all units

Optional Surrounds



Borderview Surround
Powder Coated

1 1/4 Slim Line Surround
Painted Black

Compatible with all units

Fluted Liner




Compatible with all units

Ledgestone Liner




Compatible with all units

Black Glass Liner

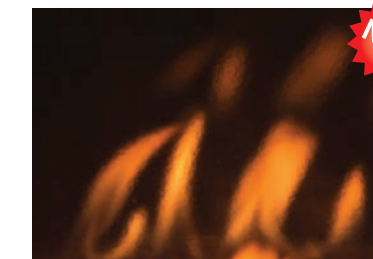

Compatible with all units

Painted Black Liner

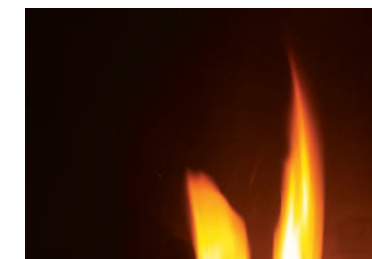

Included with all units

The best way to visualize your
dream fireplace at home
is with the Enviro App!



Manufactured by Sherwood Industries Ltd. Victoria, BC, Canada | enviro.com

Printed in Canada, November 2022

