

Service Manual Ceiling Mount Ventilating Fan WhisperCeiling[™]





FV-20/30/VQ3

Remark: Because of different structure, we divide some parts into Style A and Style B, before you order these parts, please confirm which style is adapt to your machine.

SPECIFICATIONS

Model no.	Air direction	V	Hz	Power Consumption	Speed	Air deliver at 0.1"WG	Weight
				(W)	(rpm)	(cfm)	lb. (kg)
FV-15VQ3	Exhaust	120		40.0	880	150	11.4(5.2)
FV-20VQ3			60	43.5	590	190	13.4(6.1)
FV-30VQ3		Exhaust 120	120	120 00	66.5	780	290

Specifications are based on HVI standard.

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

IMPORTANT SAFETY NOTICE -

There are special components used in this equipment which are important for safety. These parts are marked by \triangle in the Schematic Diagrams, Exploded Views and Replacement Parts List. It is essential that these critical parts should by replaced with manufacturer's specified parts to prevent shock, fire or other hazards. Do not modify the original design without permission of manufacture.

CONTENTS	PAGE
1 Parts Identification	1~3
2 Wiring Diagram	
3 Parts List	5~8



1 Parts Identification

6 J 0 9(2pcs) (3A) 43 2(3pcs) 44A (4) 10 (12)... (4) -11 14-45 Earth (3pcs) (Green) 11 5 4(2pcs) 12 Q 16 15 (2pcs) (3pcs) 17 (16)(13A) -19 18 48 46 (5pcs) 47 CAUTION: (2pcs) Cord 0 ATTENTION: istille byotibler a secteurs dotel 20 (Black) Cord (White) 38 (49A) (3A) 39 \mathbb{M} 50 37 LP-03 LR-03 0 44A) Motor Lead Style A Ο (White) Motor Lead -21(3pcs) Earth (Red) F (Green) (3B) ΉÐ Motor Lead 49B Ø÷. (Black) (18) 6 22 VLP-03 VLR-03 49A) 44B) Style B Wiring Section Cord Differentiation 23 24 25 28(2pcs) 26 41 51 40 56 29 42 (2pcs) 57 • 52 53 27 30(3pcs) 58 31 33 (2pcs) 32 (2pcs) 54 35 36 55 (2pcs)


FV-15VQ3

Main Packing Section


Remark: Please take attention to the parts which circled with broken line, We express the different style parts in using a letter marked behind a number, such as 3A means the item 3 belongs to style A.


34

1 Parts Identification

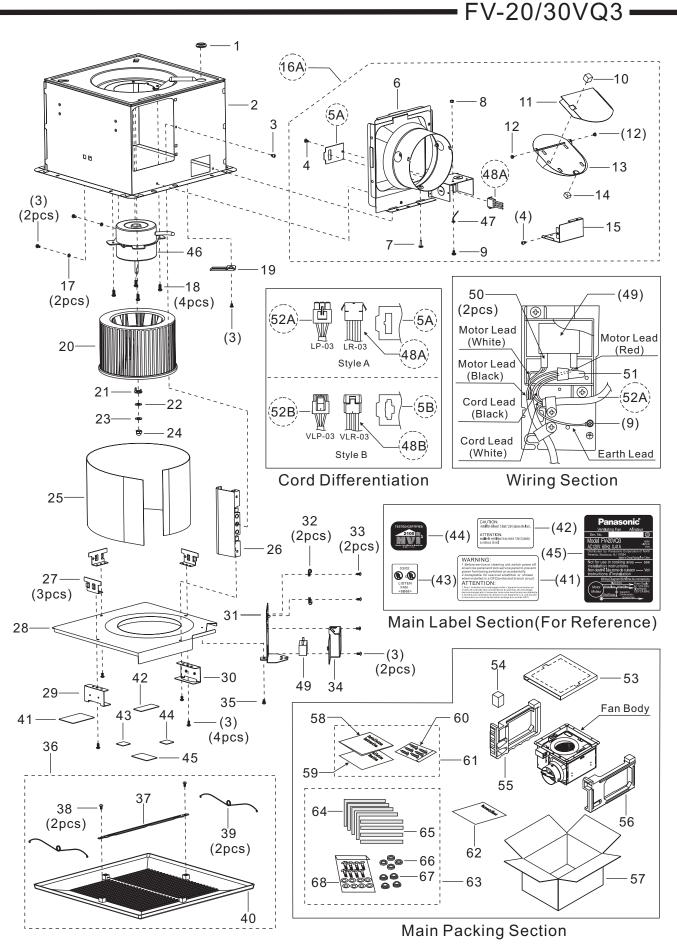

Remark: Please take attention to the parts which circled with broken line, We express the different style parts in using a letter marked behind a number, such as 5A means the item 5 belongs to style A.

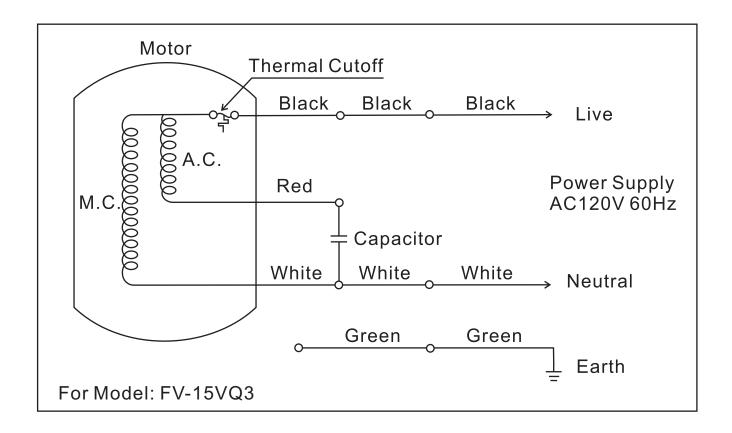

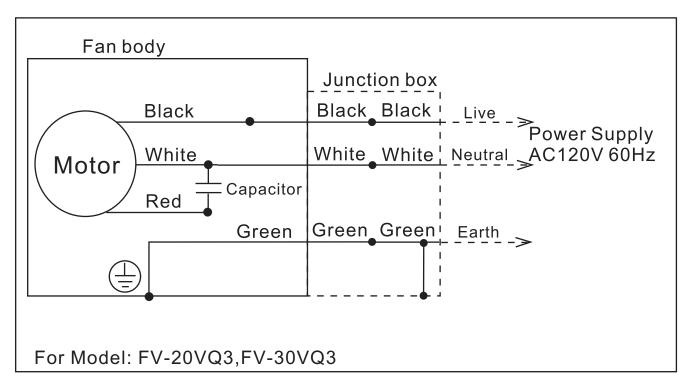

—— FV-15VQ3 ——

Mechanical & Metal Section

No.	Part No.	Part Name	Q'ty	Remark
1	FFV1600030S	Frame Assy.	1	
2	FFV7000064S	Bind Screw	3	For Fixing Casing Support to Frame Assy.
3A	FFV0900008S	Connector Plate	1	For Style A
3B	FFV0900012S	Connector Plate	1	For Style B
4	FFV7000091S	Pan Tap Screw	4	
5	FFV5710016S	Suspension Plate	1	
6	FFV7020015S	Hexagon Nut	1	For Fixing Earth Lead Wire
7	FFV0000063S	Adapter Sub Assy.	1	
8	FFV5520019S	Shutter Pad	1	
9	FFV5750004S	Shutter Rivet	2	
10	FFV5510053S	Shutter	1	
11	FFV2800004S	Junction Cover	1	
12	FFV7030001S	Screw Assy.	2	For Fixing Earth Lead Wire
13A	FFV0000010S	Adapter Assy.	1	For Style A
13B	FFV0000073S	Adapter Assy.	1	For Style B
14	FFV0800001S	Casing Support	3	
15	FFV7040005S	Thumb Screw	3	In Accessory Set
16	FFV7000074S	Truss Tap Screw	3	For Fixing Capacitor Box & Cord Clip
17	FFV0760024S	Capacitor Box	1	
18	FFV0740007H	Cord Clip	1	
19	FFV7000073S	Truss Screw	5	For Fixing Motor Support to Casing
20	FFV3730004S	Motor Support	1	
21	FFV7000079S	Pan Tap Screw	3	For Fixing Motor to Motor Support
22	FFV0400081S	Blade	1	
23	FFV4670003S	Blade Set Plate	1	Use For Fixing Blade
24	FFV7010025S	Plain Washer	1	Use For Fixing Blade
25	FFV7010026S	Spring Washer	1	Use For Fixing Blade
26	FFV7020007S	Blade Set Nut	1	For Fixing Blade
27	FFV0790009S	Casing	1	
28	FFV4610005S	Sponge B	2	Sticked on Casing
29	FFV4610004S	Sponge A	2	Sticked on Casing
30	FFV7000065S	Bind Screw	3	For Fixing Casing to Casing Support
31	FFV7000140S	Pan Tap Screw	2	For Fixing Spring Stopper to Grille
32	FFV5560027S	Spring Stopper	1	
33	FFV5560017S	Spring	2	
34	FFV3400085S	Grille	1	
35	FFV5250001S	Ring	2	
36	FFV3400026S	Grille Assy.	1	
37	FFV2530001S	Insulock Tie 2	1	

Label Section

No.	Part No.	Part Name	Q'ty	Remark
38	FFV6730002S	Warning Label	1	Sticked on Frame Assy.
39	FFV0810002S	Caution Label	1	Sticked on Frame Assy.
40	FFV4020079S	Name Plate	1	Sticked on Casing
41	FFV2260002S	HVI Mark	1	Sticked on Casing
42	FFV2260003S	Holograph Label	1	Sticked on Casing
43	FFV5720015S	Scale Tape	1	Sticked on Frame Assy.

Electrical Section

No.	Part No.	Part Name	Q'ty	Remark
44A	FFV0900002S	Connector Assy.	1	For Style A
44B	FFV0900013S	Connector Assy.	1	For Style B
45	FFV3402103S	Earth Lead Wire	1	\bigtriangleup
46	FFV2240001S	Heat Shrink Tube	2	\triangle
47	FFV0750046S	Capacitor	1	220V,5.3uF
48	FFV0900024S	Connector	1	\bigtriangleup
49A	FFV0730025S	Cord	1	For Style A
49B	FFV0730020S	Cord	1	For Style B
50	FFV3700107S	Motor Assy.	1	120V,60Hz

Packing & Accessories Section

No.	Part No.	Part Name	Q'ty	Remark
51	FFV0420010S	Suspension Bracket II	1	
52	FFV0420022S	Suspension Bracket I	1	
53	FFV0420023S	Suspension Plate I	1	
54	FFV0010138S	Accessory Set	1	
55	FFV6720003S	Warranty Sheet	1	For USA Market
(55)	FFV6720002S	Warranty Sheet	1	For CA Market
56	FFV4710025S	Grille Pad Assy.	1	
57	FFV4710164S	Frame Pad	1	
58	FFV9000326S	Packing Case Assy.	1	

FV-20/30VQ3 -----

Mechanical & Metal Section

No.	Part No.	Part Name	Q'ty	Remark
1	FFV0720007S	Cord Bushing	1	
2	FFV1600031S	Frame Assy.	1	
3	FFV7000074S	Truss Tap Screw	10	
4	FFV7000091S	Pan Tap Screw	2	For Fixing Connector Plate & Junction Cover
5A	FFV0900008S	Connector Plate	1	For Style A
5B	FFV0900012S	Connector Plate	1	For Style B
6	FFV0000062S	Adapter Sub_Assy.	1	
7	FFV0740015S	Clip	1	
8	FFV7020015S	Hexagon Nut	1	For Fixing Earth Lead Wire
9	FFV7030001S	Screw Assy.	2	For Fixing Earth Lead Wire
10	FFV4610021S	Sponge 3	1	Sticked on Shutter
11	FFV4610022S	Sponge	1	Sticked on Shutter
12	FFV5520016S	Shutter Fix Rubber	2	
13	FFV5510052S	Shutter	1	
14	FFV4610023S	Sponge 2	1	Sticked on Shutter
15	FFV2800006S	Junction Cover	1	
16A	FFV0000011S	Adapter Assy.	1	For Style A
16B	FFV0000072S	Adapter Assy.	1	For Style B
17	FFV7010027S	Toothed Lock Washer	2	Use For Fixing Adapter Assy.
18	FFV7000079S	Pan Tap Screw	4	For Fixing Motor Assy.
19	FFV3450001S	Lead Wire Protect Plate	1	
20	FFV0400081S	Blade	1	
21	FFV4670003S	Blade Set Plate	1	
22	FFV7010025S	Plain Washer	1	Use For Fixing Blade
23	FFV7010026S	Spring Washer	1	Use For Fixing Blade
24	FFV7020007S	Blade Set Nut	1	For Fixing Blade
25	FFV0790010S	Casing	1	
26	FFV0940001S	Cut Off	1	
27	FFV5710003S	Orifice Set Plate	3	
28	FFV4300066S	Orifice	1	
29	FFV5710001S	Set Plate 1	1	
30	FFV5710002S	Set Plate 2	1	
31	FFV5710004S	Capacitor Set Plate	1	
32	FFV0740017S	Cord Clip	2	
33	FFV7000018S	Truss Tap Screw	2	For Fixing Cord Clip
34	FFV0760024S		1	
35	FFV7000007S	Plus Screw	1	For Fixing Capacitor Set Plate to Orifice
36	FFV3400027S	Grille Assy.	1	
37	FFV5560030S	Spring Stopper	1	
38		Pan Tap Screw	2	For Fixing Spring Stopper to Grille
39	FFV5560017S	Spring	2	
40	FFV3400096S	Grille	1	

FV-20/30VQ3 -----

Label Section

No.	Part No.	Part Name	Q'ty	Remark
41	FFV6730002S	Warning Label	1	Sticked on Orifice
42	FFV0810002S	Caution Label	1	Sticked on Orifice
43	FFV2260003S	Holograph Label	1	Sticked on Orifice
44	FFV2260002S	HVI Mark	1	Sticked on Orifice
45	FFV4020076S	Name Plate	1	For Model FV-20VQ3, Sticked on Orifice
(45)	FFV4020077S	Name Plate	1	For Model FV-30VQ3,Sticked on Orifice

Electrical Section

No.	Part No.	Part Name	Q'ty	Remark	
46	FFV3700108S	Motor Assy.	1	120V,60Hz,For Model FV-20VQ3	\triangle
(46)	FFV3700109S	Motor Assy.	1	120V,60Hz,For Model FV-30VQ3	\triangle
47	FFV3402103S	Earth Lead Wire	1		\triangle
48A	FFV0900002S	Connector Assy.	1	For Style A	\triangle
48B	FFV0900013S	Connector Assy.	1	For Style B	\triangle
49	FFV0750047S	Capacitor	1	200V,6.5uF,For Model FV-20VQ3	\triangle
(49)	FFV0750048S	Capacitor	1	200V,9.5uF,For Model FV-30VQ3	\triangle
50	FFV2240001S	Heat Shrink Tube	2		\triangle
51	FFV0900024S	Connector	1		\triangle
52A	FFV0730017S	Cord	1	For Style A	\triangle
52B	FFV0730026S	Cord	1	For Style B	\triangle

Packing & Accessories Section

No.	Part No.	Part Name	Q'ty	Remark
53	FFV4710241S	Grille Pad Assy.	1	
54	FFV9000569S	Packing Case Assy.	1	For Hanger Assy. Packing
55	FFV4710242S	Left Pad	1	
56	FFV4710243S	Right Pad	1	
57	FFV9000570S	Packing Case Assy.	1	For Model FV-20VQ3
(57)	FFV9000571S	Packing Case Assy.	1	For Model FV-30VQ3
58	FFV2540058S	Installation Instruction	1	English,For USA/CA Market
59	FFV2540059S	Installation Instruction	1	Spanish,For USA Market
(59)	FFV2540060S	Installation Instruction	1	French,For CA Market
60	FFV0010169S	Accessory Set A	1	
61	FFV0010137S	Accessory Set	1	For USA Market
(61)	FFV0010170S	Accessory Set	1	For CA Market
62	FFV6720003S	Warranty Sheet	1	For USA Market
(62)	FFV6720002S	Warranty Sheet	1	For CA Market
63	FFV2230005S	Hanger Assy.	1	
64	FFV2230006S	Hanger	4	Included In Hanger Assy.
65	FFV5210003S	Rubber Plate	4	Included In Hanger Assy.
66	FFV5210002S	Rubber Washer 2	4	Included In Hanger Assy.
67	FFV5210001S	Rubber Washer 1	4	Included In Hanger Assy.
68	FFV0010031S	Accessory	1	Included In Hanger Assy.